
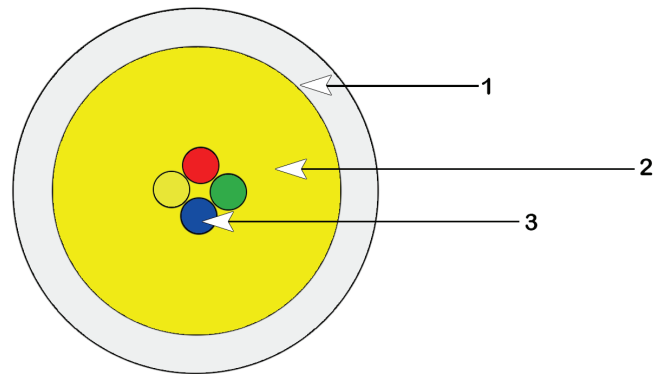


cimler

fiber optic cable

MODEL:	ARZ
TYPE:	U-V(ZN)H
NAME:	FTTH Round Drop

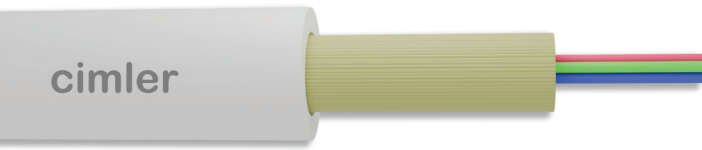

Features and Cable design

Features

Premium materials for lasting performance

Meets global safety standards

Up to 4 fibers

Design

1.FR-LSZH outer jacket

2.Aramid yarn

3.Tight buffer fibers 600 µm

Specifications

Parameters	Value	Unit	Method
Cable outer diameter	mm	Ø 4,0 ± 0,4	
Outer jacket thickness	mm	0,8	
Cable weight	kg/km	16,00	
Tensile strenght	N	400	EN 60794-1-21-E1
Crush resistance	N	1200	EN 60794-1-21-E3
Impact resistance	Nm	5	EN 60794-1-21-E4
Temperature range installation	°C	-15 to + 50	EN 60794-1-22-F1
Temperature range operation	°C	-20 to + 70	EN 60794-1-22-F1
Temperature range storage	°C	-20 to + 70	EN 60794-1-22-F1
CPR cable classification		Cca	
Fiber colour coding by standart	IEC	60304	

Fiber Coloures Coding

**1.Red 2.Green
3.Blue 4.Yellow**

Fiber types

SM G.657A1

SM G.657A2

MM OM3



made in EU



www.cimlercable.com
sales@cimlercable.com

Address: Multifunctional zone, distr. 14, 2730 Simitli, Bulgaria