
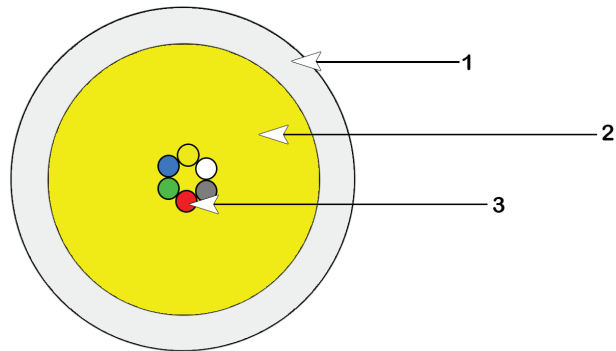


cimler

fiber optic cable

MODEL:	ARB/ARD
TYPE:	U-N(ZN)H
NAME:	FTTH Round Drop

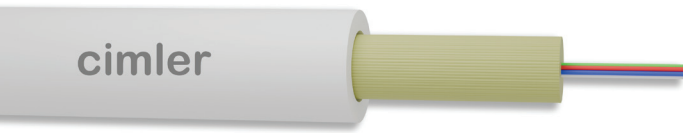

Features and Cable design

Features

Premium materials for lasting performance

Meets global safety standards

Up to 6 fibers

Design

1.FR-LSZH outer jacket

2.Aramid yarn

3.Optical fibers 250 μm

Specifications

Parameters	Value	ARB	ARD	Method
		Unit	Unit	
Cable outer diameter	mm	∅ 3,0 ± 0,3	∅ 4,0 ± 0,4	
Outer jacket thickness	mm	0,8		
Cable weight	kg/km	10,00	16,00	
Tensile strenght	N	300	400	EN 60794-1-21-E1
Crush resistance	N	1000	1200	EN 60794-1-21-E3
Impact resistance	Nm	5		EN 60794-1-21-E4
Temperature range installation	°C	-15 to + 50		EN 60794-1-22-F1
Temperature range operation	°C	-20 to + 70		EN 60794-1-22-F1
Temperature range storage	°C	-20 to + 70		EN 60794-1-22-F1
CPR cable classification		Cca		

Fiber colour coding by Standart IEC 60304

Fiber Coloures Coding

1.Red 2.Green
3.Blue 4.Yellow
5.White 6.Grey

Fiber types

SM G.657A1

SM G.657A2

MM OM3



made in EU



www.cimlercable.com
sales@cimlercable.com

Address: Multifunctional zone, distr. 14, 2730 Simitli, Bulgaria